

FEATURES

Description	Volume (litres)	Inner diameter	Weight (kg +/-0,5)	Tank height exc. head (mm)	Filtration height (mm)	Flow (*) (m ³ /h)
RE-FTOP 150	150	18in - 460mm	18.3	1 220	700	6
RE-FTOP 245	245	18in - 460mm	24.9	1 790	1 100	
RE-FTOP 300	300	24in - 610mm	29	1 315	700	10
RE-FTOP 450	450	24in - 610mm	39.1	1 825	1 100	

Minimal service temperature 1°C, Maximum service temperature 50°C. Maximum working pressure 6 bar.
* Diameter, height and weight can be slightly altered without prior notice

(*) The indicated **flow rates** depend on the filtration head used; they are chosen here for a maximum velocity (filtration or backwash) of **35 m/h**.


Other filtration heads are available on request if higher flows and velocities are required.

100% corrosion-resistant
Tank Warranty 10 years
Light Tanks



Demanganization, iron removal
Turbidity, glass, activated carbon
Water softener, mineralization

ASSEMBLY EXAMPLE :

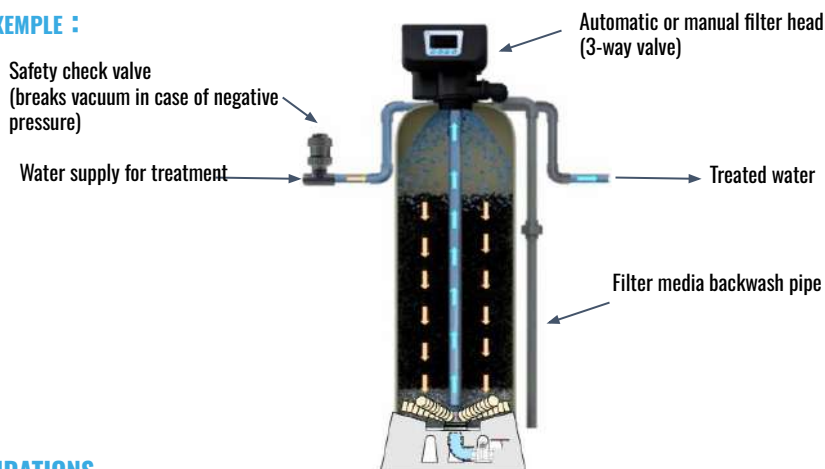

Optional

Filter head 6 m³/h or 10 m³/h (*)
Automatic or Manual



(*) other flow rates available on request

As your wish

Taraudage couvercle sur mesure
expl. 4"-8UN ou 2"1/2



RECOMMENDATIONS

- Tank should be connected by a **flexible connection**
- Tank should be **moved/handelt empty**
- Before filled the filter, **please check the strainers**
- **Fill the filter halfway with water** to protect the strainers before pouring in your filter media.
- **Never empty the reservoir** (do not purge the reservoir without an air vent).

ADVANTAGES



A wide opening
Easy filling and access to tank interior



A fixed strainer system :
This keeps the star in the center and prevents the strainers from moving during maintenance operations.



A purge valve :
Easy emptying